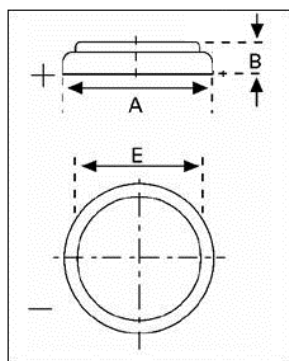


Data Sheet
Preliminary Data Sheet


Type Number 6025
Designation IEC CR 2025
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... MH 13654
Nominal Voltage 3 V
Typical Capacity C 157 mAh
 Load 10 kOhm, at 20°C down to 2 V

Weight (approx.) 2,5 g
Volume 0,75 ccm
Coding..... Date of Manufacturing DWWY

Temperature Ranges min max.
 Storage -55°C 70°C
 Discharge -20°C 70°C *

Dimensions
 Diameter (A) min max.
 Height (B) 19,7 20,0
 Shoulder Diameter[E]..... 2,2 2,5
 18,3

Segment

Main Applications Watches
 Digicams
 Electronics

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w	10000 Ω	Time: Capacity [mAh]: Energy [mWh]:	552 h 157 440

* Contact VARTA if the application is intended to be outside the range of -20°C to +70°C.

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration


VARTA Microbattery GmbH, Daimlerstr. 1, D-73479 Ellwangen/Jagst
 Tel.: (+49) 7961/921-0, Telefax: (+49) 7961/921-553

Subject to change without prior notice!
 Date of issue: 2013_07_03


Data Sheet

Performance Data:

- Temperature Characteristics**

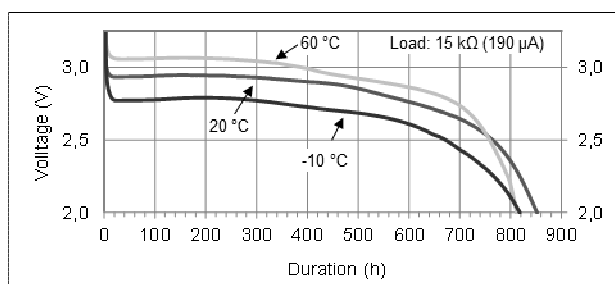


- Operating Voltage vs. load resistance ***

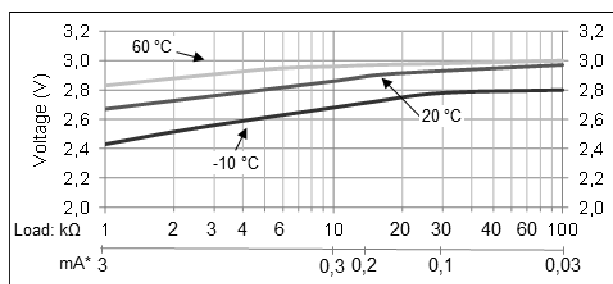

* Voltage at 50% discharge depth

- Capacity vs. load resistance**

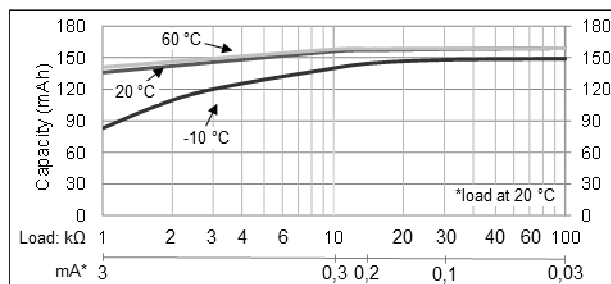

- Self-discharge rate < 1% at room temperature
- Storage life > 10 years
- Operating life* > 10 years

* depending on environmental conditions and energy consumption

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration

VARTA Microbattery GmbH, Daimlerstr. 1, D-73479 Ellwangen/Jagst

Tel.: (+49) 7961/921-0, Telefax: (+49) 7961/921-553

Subject to change without prior notice!

Date of issue: 2013_07_03