
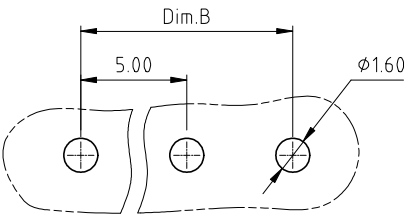
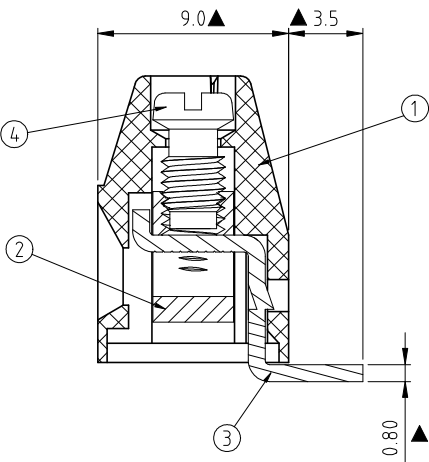
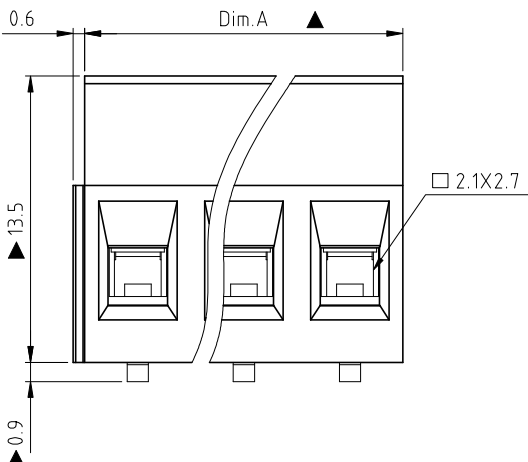


RoHS Compliant

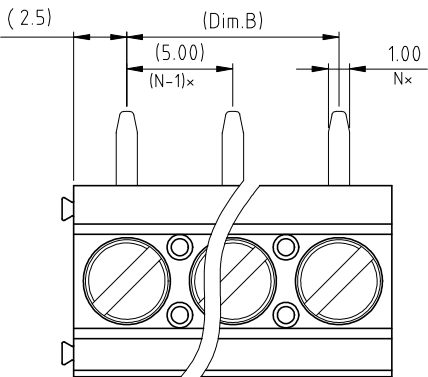

P.C.B LAYOUT

N = Number of poles
Dim.A=Nx5.0
Dim.B=(N-1)x5.0

Poles	Dim.A Tol.
2-6p	±0.15
7-12p	±0.20
13-18p	±0.30
19-24p	±0.40

Material:

- Item ① Terminal housing :Thermoplastic (UL 94V-0)
- Item ② Clamp : Brass ,Ni plated
- Item ③ Wire guard solder pin : Brass ,Bright Tin plated
- Item ④ Terminal screw: Steel Zinc plating"-slot type

- △ Electrical cULus TUV
- Voltage rating: 300VAC 250VAC
 - Current rating: 16A 17.5A
 - Wire range: 0.2-1.5mm²
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
 - Torque: 3.5Lb-In. 0.5N.m
 - Screw: M3
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV 2.0KV
 - Operating temperature: -40°C to +115°C
 - Wave soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval:
 - Critical dimension:
 - Reference dimension: (×)The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.


VI xx 01 x 0 xxxx G

- | | | |
|------------------|--------------------|-------------------------|
| No. of poles end | 0 Black | 0000:"@Logo (Standard) |
| stackable design | 5 Green(RAL6018/T) | 000A:"ANYTEK"Logo |
| 02 2 POLES | 6 Blue | Any special item by |
| 03 3 POLES | 8 Grey(RAL7035/D) | customer request, |
| | C Green(RAL6018/U) | please contact sales |
| 24 24 POLES | | department. |
- RoHS compliant (lead<4%)
In copper Alloy

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VI 5.0 SERIES 90° wire inlet				
PART NO.		VIxx01x0xxxxG		DWG NO.	8VI0059	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Rhine 2020.06.30	Rhine 2020.06.30		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					SHEET: 01/01	REV: C