



Technical drawing of a bolt with dimensions: 0.6, 3.7, and 4.0.



a=K(std)
or F(fast)




□ Color code

- 03-3A: violet
 05-5A: LT. brown
 06-6A: moss green
 75-7.5A: brown
 10-10A: red
 15-15A: blue
 20-20A: yellow
 25-25A: white
 30-30A: green
 40-40A: orange

Y: mark code
 0 - IG. PROTECTED
 1 - std. Glosso mark
 2 - blank, no any mark
 y - consult factory
 for special mark

cross to 227
1610(std)
1616(fast)

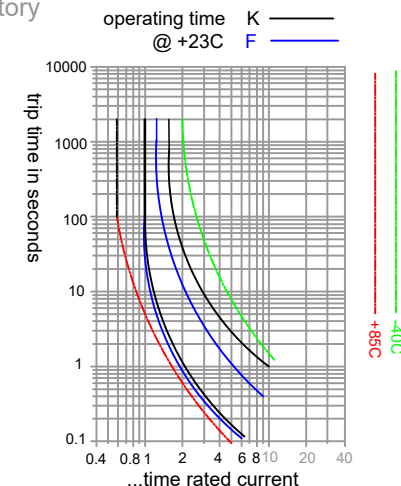

operating time	by sec.	K (std)	F (fast)
	0.7 / _R	>3600	>3600
	1 / _R	>1800	>1800
	1.1 / _R	>10	>7
	1.35 / _R	3-600	3-120
	1.6 / _R	2-120	2-50
	2 / _R	1-40	1-12
	3.5 / _R	0.35-6	0.35-2.6
	6 / _R	0.13-2	0.13-0.8

degrading factor	ambient temp.	factor	ambient temp.	factor
	-40F/-40C	0.73	+73F/+23C	1.0
	-22F/-30C	0.78	+104F/+40C	1.0
	-4F/-20C	0.82	+122F/+50C	1.1
	+14F/-10C	0.86	+140F/+60C	1.2
	+32F/0C	0.91	+158F/+70C	1.3
	+50F/+10C	0.95	+185F/+85C	1.4

0<1 ± 0.05	18<50 ± 0.4	Material		Parts no	E379	 GLOSOTECH YOUR POWER, PROTECTED			
0<6 ± 0.2	50<120 ± 0.5			Drawing by	宋铁强				
6<18 ± 0.3	120<250 ± 0.6	Date	18.09.01	Check by	万文				
Tolerance unless otherwise specited,unit in mm		Issue	A/2	Approve by	楊林		Drawing no	E3 79	Model code