


KMK-PA-OB counternut without collar

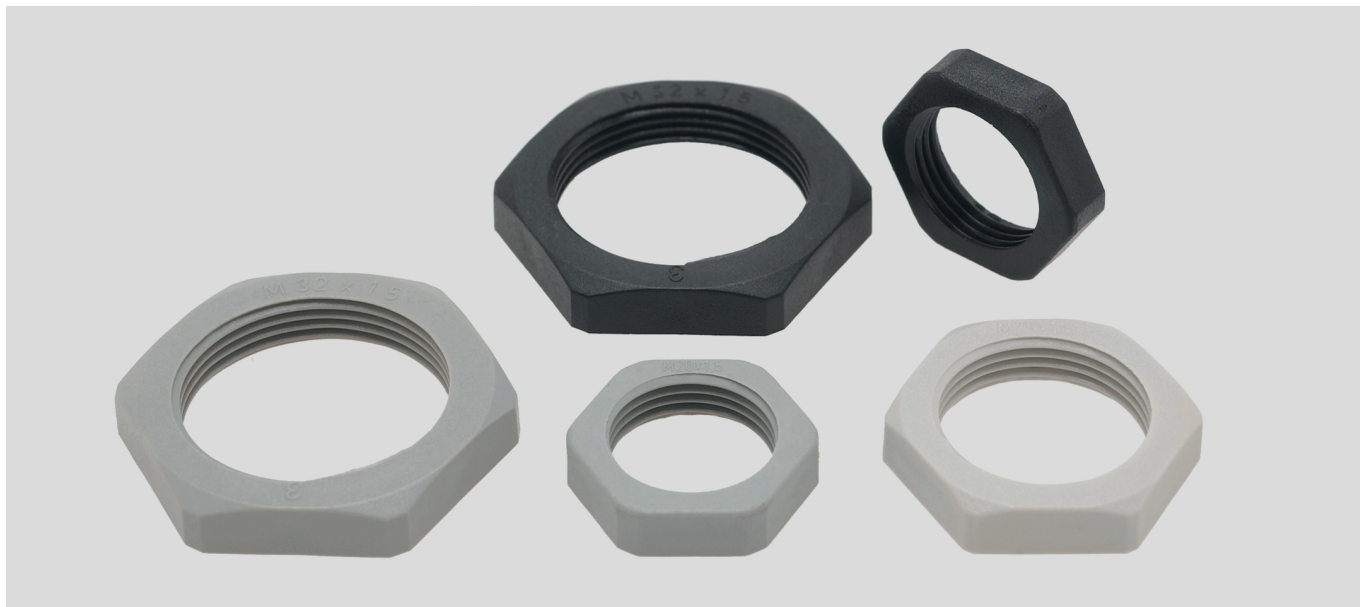

KMK-PA-OB

Locknut made of polyamide without collar.

Material

Polyamide PA 6


Technical data

Temperature range: -40°C up to +100°C

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

- halogen-free
- phosphor-free
- silicone-free
- cadmium-free



Dimensions

G Thread size inside
SW Spanner size

metric thread – female

Part no. light grey RAL 7035	Part no. dark grey RAL 7001	Part no. black RAL 9005	Size Metr.	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
94630	94640	94650	M12 x 1,5	18	100	o. r.	o. r.	o. r.
94631	94641	94651	M16 x 1,5	22	100	o. r.	o. r.	o. r.
94632	94642	94652	M20 x 1,5	26	100	o. r.	o. r.	o. r.
94633	94643	94653	M25 x 1,5	32	100	o. r.	o. r.	o. r.
94634	94644	94654	M32 x 1,5	41	100	o. r.	o. r.	o. r.
94635	94645	94655	M40 x 1,5	50	50	o. r.	o. r.	o. r.
94636	94646	94656	M50 x 1,5	60	50	o. r.	o. r.	o. r.
94637	94647	94657	M63 x 1,5	75	25	o. r.	o. r.	o. r.

PG thread – female

Part no. light grey RAL 7035	Part no. dark grey RAL 7001	Part no. black RAL 9005	Size PG	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
94270	94280	94290	7	19	100	o. r.	o. r.	o. r.
94271	94281	94291	9	22	100	o. r.	o. r.	o. r.
94272	94282	94292	11	24	100	o. r.	o. r.	o. r.
94273	94283	94293	13,5	27	100	o. r.	o. r.	o. r.
94274	94284	94294	16	30	100	o. r.	o. r.	o. r.
94275	94285	94295	21	36	100	o. r.	o. r.	o. r.
94276	94286	94296	29	46	50	o. r.	o. r.	o. r.
94277	94287	94297	36	60	25	o. r.	o. r.	o. r.
94278	94288	94298	42	65	25	o. r.	o. r.	o. r.
94279	94289	94299	48	70	25	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request