
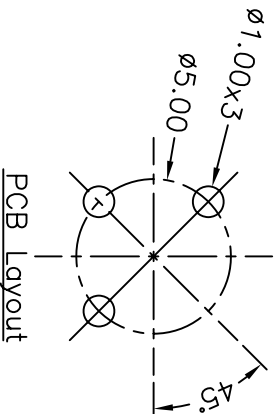
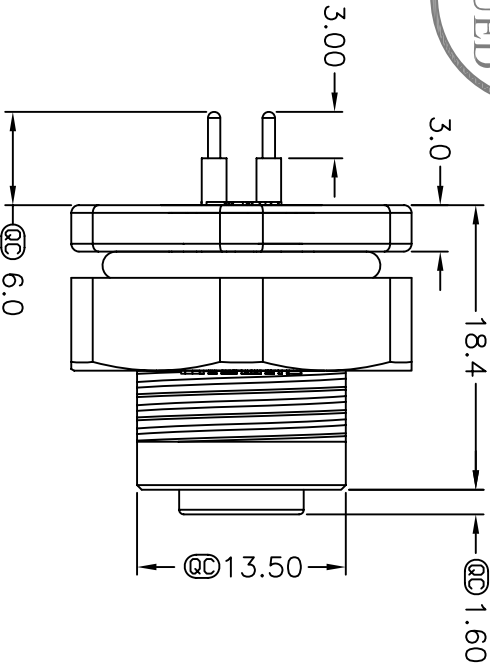



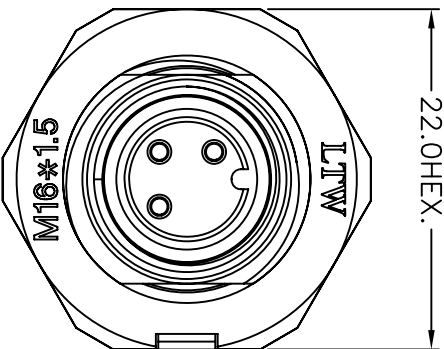
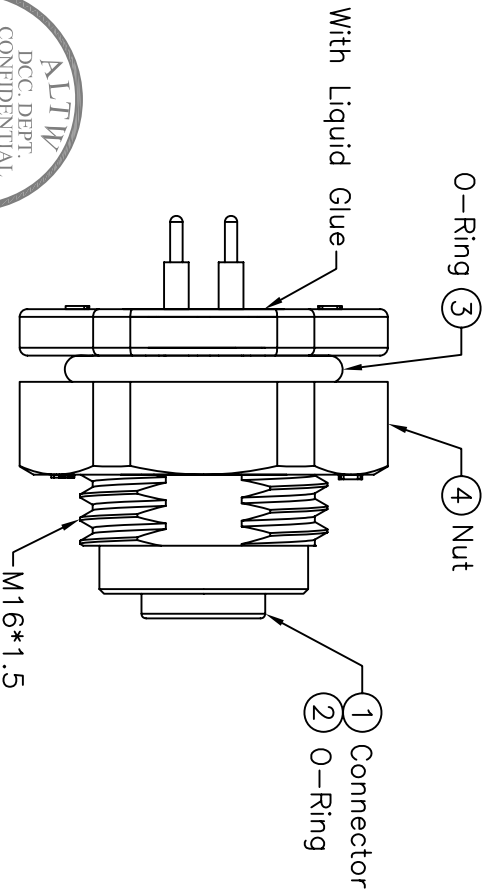
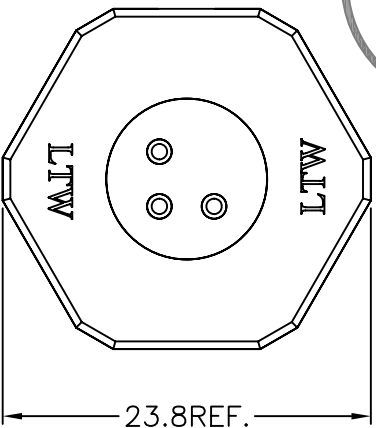


REV.		ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial	Release	2010/09/14	Rex	Change Rev.01 To Rev.A



- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP68 (水深1米, 24hrs)
 - * Connector: Nylon+GF, 94V-0, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Shield: Nylon+GF, 94V-0, Black
 - * Nut: Nylon+GF, 94V-0, Black
 - * O-Ring(Inner): Silicone, Gray, 94V-0
 - * O-Ring(Outer): Silicone, Gray, 94V-0
 - * For Panel Thickness Max 4.0mm

UNIT:mm				TITLE		M12 CONN,PCB		ITEM NO		DRAWN BY		DATE			
TOLERANCE		±0.25 .XX .XXX ANGLES ±1°		PANEL SCREW 3PIN F CONN F PIN		SCALE Free		SHEET 1 OF 1		DWG NO LTW12P-03PFFP-SF8001		CHECKED BY Winnie		DATE 2010/09/17	
REV. A		SIZE A4		QC :inspection Item		安費諾亮泰企業股份有限公司		CUSTOMER		APPROVED BY Kevin		DATE 2010/09/17			
1		2		3		4		5		6		7		8 FMM0702-01-A	