


RoHS compliant

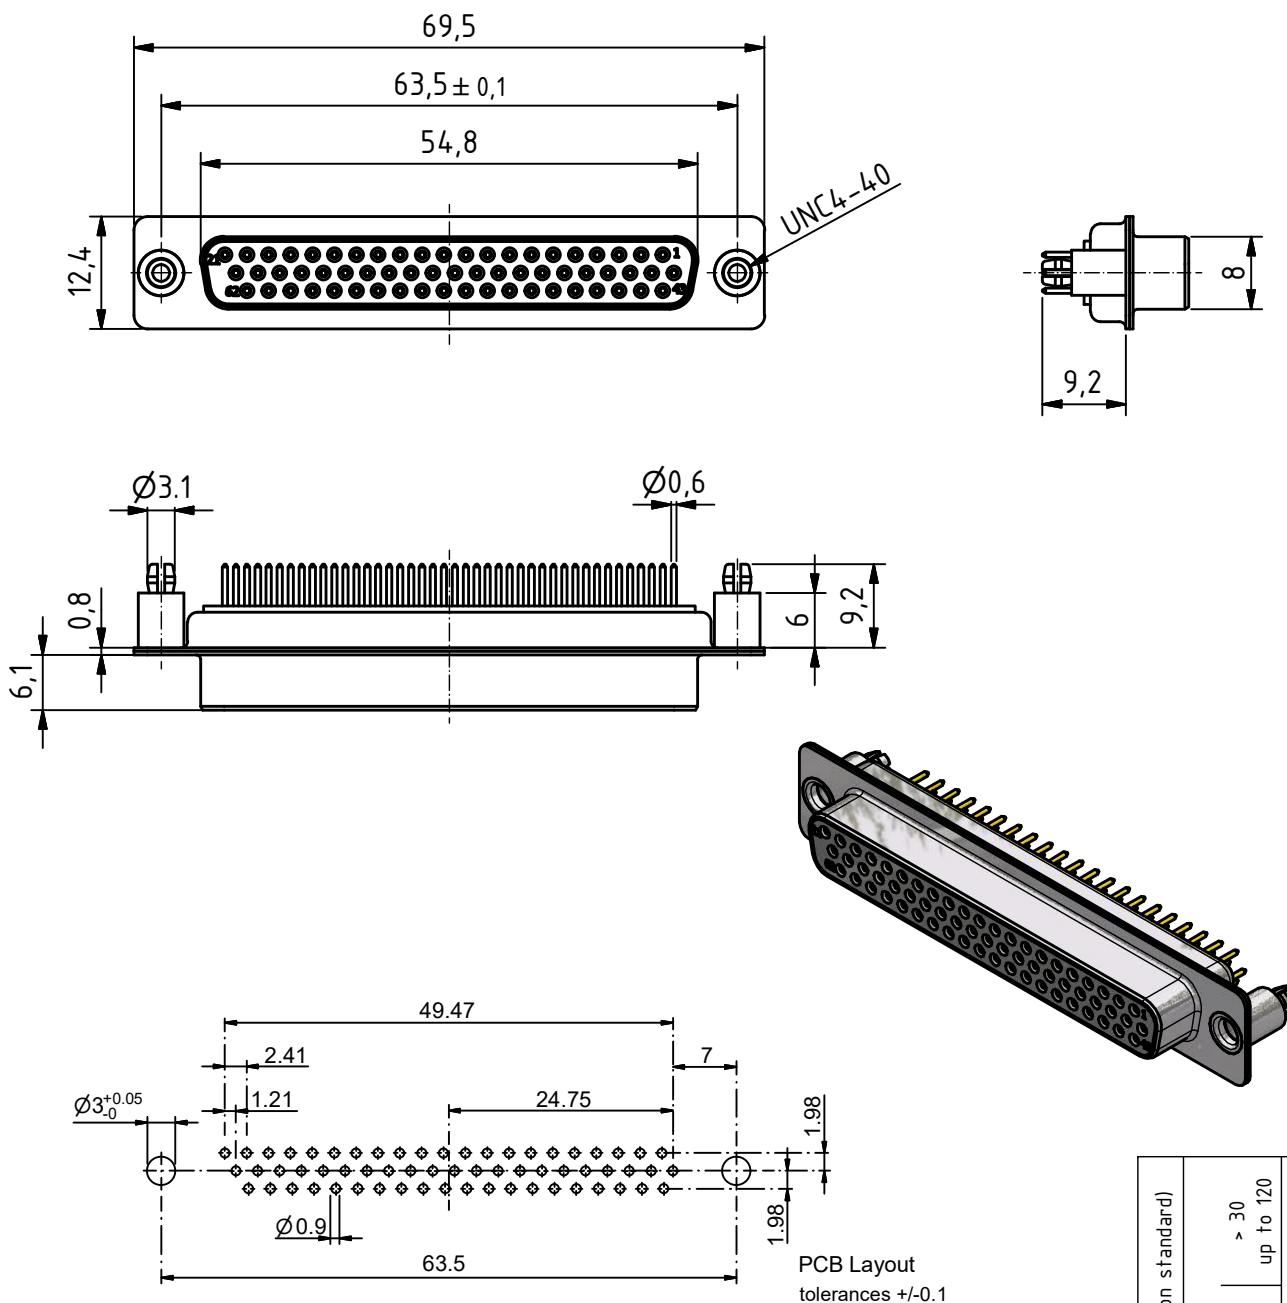

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)				
size in mm				
> 0,5	> 3	> 6	> 30	
up to 3	up to 6	up to 30	up to 120	
tolerances				
±0,1	±0,2	±0,2	±0,3	

modification	Rev.	Rev.	Rev.	DE009874		
	Rev.	Rev.	Rev.	part no.		
HD-D62SY/2M86UN				1.2:1	drawn	30.11.2018
				scale	checked	rop
					approved	
DELTRON CONNECT 2 CUSTOMIZE				K063277		
Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss				drawing no.		