


# Pluggable Terminal Blocks

Clamp Terminal 3.5 mm Pitch

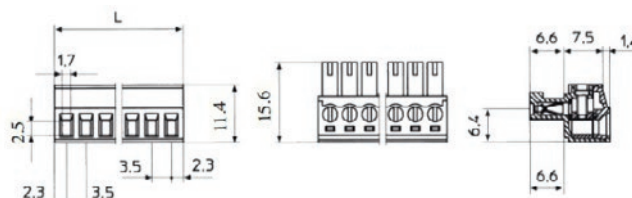

## FEATURES:

Polarised mouldings  
Closed headers  
Guided pin alignment  
Pin/terminal - Tinned phosphor bronze  
Rising clamp - Nickel copper flash brass  
Screw/torque - M2 steel Tin plated, 0.3Nm  
Recommended PCB hole size  $\varnothing 1.2$  mm  
cUL approved

## SPECIFICATION:

Pitch	3.5 mm
Gender housing	Female
Termination type	Clamp Terminals/Screw Connection
Connection cross-section	0.13-1.3 mm <sup>2</sup> (26-16AWG)
Colour	green
Rated voltage to EN	200 V
Rated current to EN	10 A
Rated voltage to UL	200 V
Rated current to UL	10 A
Temperature range	-33...+120 °C

## PRODUCT RANGE:

Art. no.	Pole no.
RND 205-00089	2
RND 205-00090	3
RND 205-00091	4
RND 205-00092	5
RND 205-00093	6
RND 205-00095	8
RND 205-00096	9