


Pluggable Terminal Blocks

Clamp Terminal 5 mm Pitch

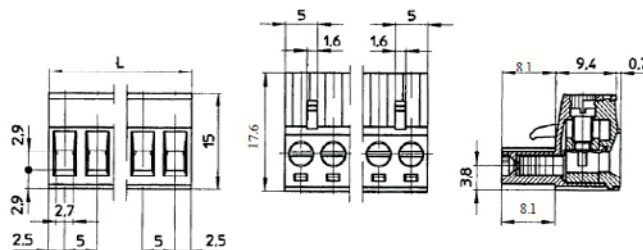

FEATURES:

Polarised mouldings

Withstand Voltage - AC1000V/1min

Wire Protector - Tin plated, phosphor bronze

Screw/Torque - M3 Steel, Tin Plated 0.4Nm

Recommended PCB hole size - $\varnothing 1.4\text{mm}$

Guided pin alignment

cUL approved

SPECIFICATION:

Pitch	5 mm
Gender housing	Female
Termination type	Clamp Terminals/Screw Connection
Connection cross-section	0.2-3.3 mm ² (24-12AWG)
Colour	green
Rated voltage to EN	300 V
Rated current to EN	15 A
Rated voltage to UL	300 V
Rated current to UL	15 A

PRODUCT RANGE:

Art. no.	Pole no.	Temperature range
RND 205-00155	2	-33...+120 °C
RND 205-00156	3	-40...+105 °C
RND 205-00157	4	-40...+105 °C
RND 205-00158	5	-40...+105 °C
RND 205-00159	6	-40...+105 °C
RND 205-00161	8	-40...+105 °C
RND 205-00162	9	-40...+105 °C