




DIN 7983 C

~ISO 7051

450 HV

Standard withdrawn

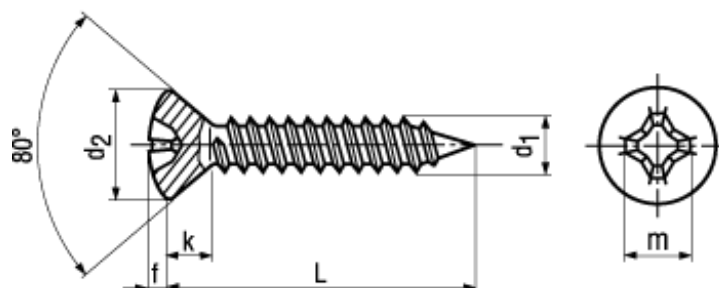

BN 996

Phillips oval countersunk head tapping screws

form H, with cone end type C

Steel case-hardened 450 HV

zinc plated blue

- ~UNI 6956 AB
- ~ČSN 021239



ISO 4042

Quenched and tempered fasteners ≥ 360 HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement!
Further notice to residual risks can be found in the introduction section.



3D Cadenas

Article#	Customer Article#	d ₁	d ₂ max.	f~	k~		m~	L
1377426		ST 2,2	4,3	0,7	1,3	1	2,8	6,5
1377434								9,5
1377442								13
1031775	47.66.26.001.5	ST 2,9	5,5	0,9	1,7	1	3,4	6,5
1377450	47.66.26.002.4							9,5
1377469	47.66.26.003.3							13
1377477	47.66.26.004.2							16
1377485								19
1377493								22
1377507								25
1377515	47.66.26.012.2	ST 3,5	6,8	1,2	2,1	2	4,6	9,5
1377523	47.66.26.013.1							13
1377531	47.66.26.014.0							16
1377558	47.66.26.015.9							19
1377566								22
1377574	47.66.26.016.8							25
1377582								32
1377590								38
1377604		(ST 3,9)	7,5	1,3	2,3	2	4,7	9,5
1377612								13
1377620								16
1377639								19
1377647								22
1377655								25
1377663	47.66.26.032.8	ST 4,2	8,1	1,4	2,5	2	4,9	9,5
1377671								13

Article#	Customer Article#	d ₁	d ₂ max.	f~	k~		m~	L
1377698	47.66.26.034.6	ST 4,2	8,1	1,4	2,5	2	4,9	16
1377701	47.66.26.036.4							19
1377728								22
1377736	47.66.26.038.2							25
1377744								32
1377752								38
1377760								45
1377779								50
1377787		ST 4,8	9,5	1,5	3	2	5,4	13
1377795	47.66.26.050.6							16
1377809	47.66.26.052.4							19
1377817								22
1377825	47.66.26.054.2							25
1377833	47.66.26.056.0							32
1377841								38
1377868								45
1377876								50