



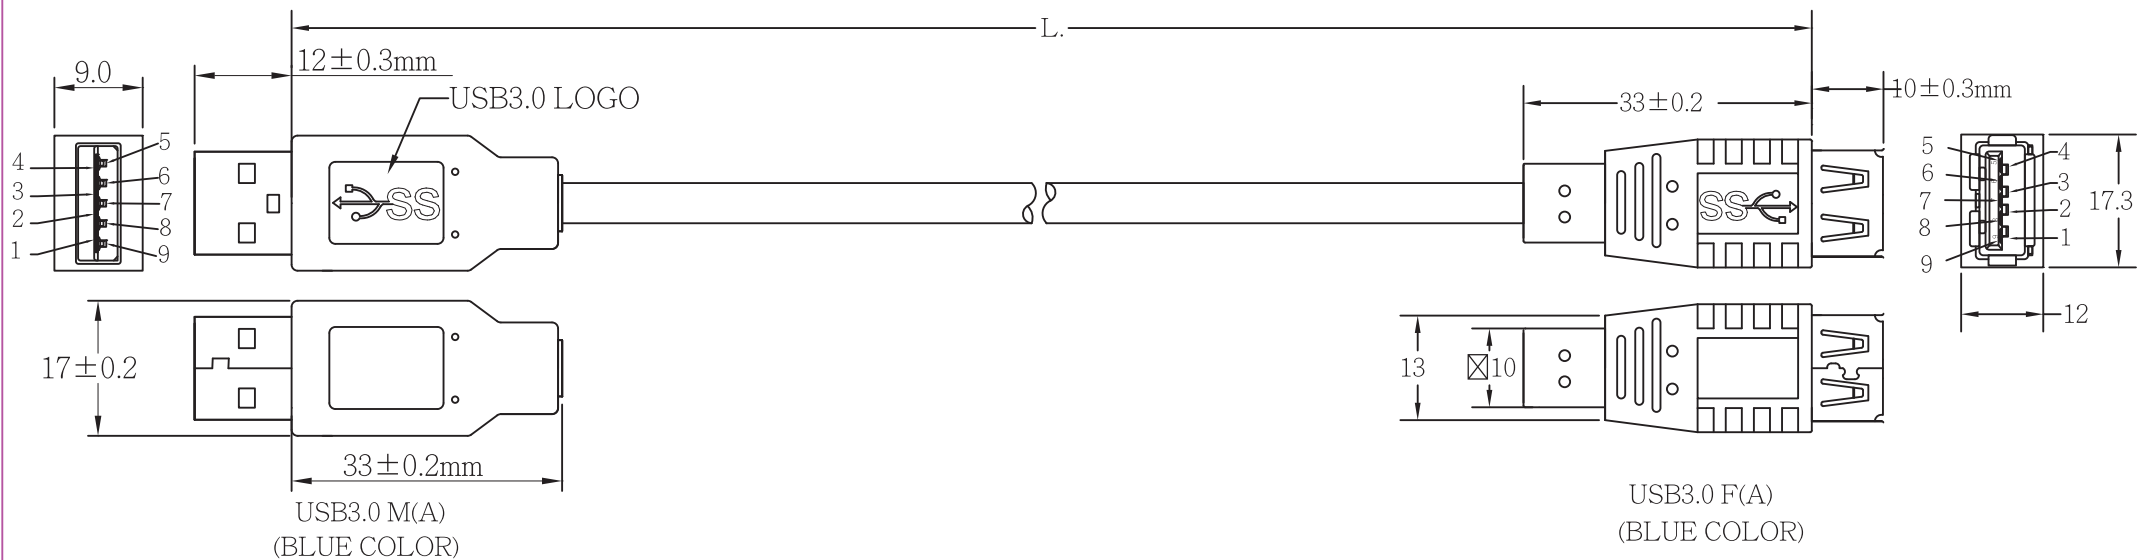

ITEM NO	COLOR	LENGTH	NO.
CU00 54	BLUE	1000±30MM	4052792001389
CU00 55	BLUE	2000±30MM	4052792001396
CU00 56	BLUE	3000±30MM	4052792001402


NOTE:

- CABLE:UL2725,AL+B-FOIL,(30AWG*1P)+[AL+MY-FOIL,(30AWG*1P+D)]*2+24AWG*2C.
BLUE COLOR,OD=5.5±0.2mm,PVC JACKET.
- LENGHT:L.
- CONNECTORS:USB3.0 M(A)*1PCS,USB3.0 F(A)*1PCS(BLUE INSULATOR)(NICKEL)(PIN GOLD PLATED 15U").
- MOLD:MOLDING USB TYPE.
- CONTACTS:

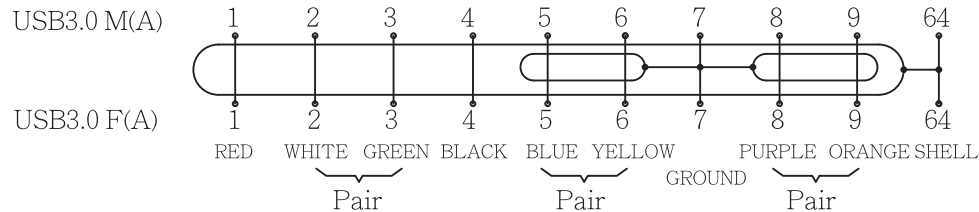


- OPEN/SHORT TEST: 100% TEST.
A.100% OPEN,SHORT&INTERMITANCE TEST.
B.CONDUCTOR RESISTANCE:3ohms MAX:
C.INSULATION RESISTANCE:5M Min/,10ms:
- ALL MUST BE RoHS COMPLIANT.

Sticker ex:

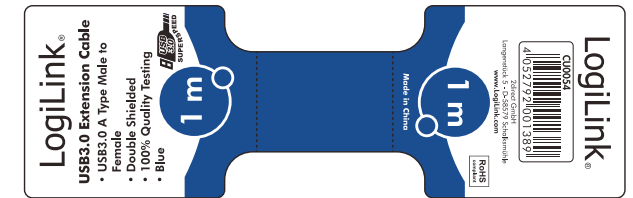

Pantone 2945C, Black
Size: 48x150 mm R= 2mm
材質: 80P銅版紙,上亮PP(光膠)



PACKING:1PCS/PE BAG+LABEL

COMPANY	2D		ITEM NO.	CU0054	NO	B6235	Part Name	USB3.0AM-AF			
REVISION	DATE	DISCRIPTION	DRAWN BY		SPEC			2direct GmbH			SCALE
REV.A/0	2012.04.23	C15-1204002	DESIGNED BY								UNIT(mm)
			APPROVAL BY								PAGE
											1/1